



GSXR600-750

FENDER ELIMINATOR

- RU27230 -RU27231 (2004-2005)

We at Rumble concept encourage all installations to be performed by a professional. If you choose to install this product, please read all instructions and take all appropriate safety measures to ensure the proper and safe installation of your new fender eliminator.

Before installation:
our fender eliminator have been designed for modification purposes, we are not responsible for the use or misuse of any products, or verification of the local department of motor vehicules.


Tools required:

Allen Key 4mm
10mm box
Phillips screwdriver

Included in the kit:

1 Fender Eliminator Bracket
1 Licence plate light
4 QU27949 M6x25
4 QU27947 M6 flange nut
2 licence plate screws + nuts

1. Remove the seat or solo seat.
2. Unplug the flashers (black, white and grey connectors).
3. Unscrew the four Allen screw under the fender.
4. Install the Fender Eliminator with the four Allen screws included.
5. Plug the licence plate light and plug the flashers.
6. Install the seat or solo seat . Test lights and flashers before going on the road.

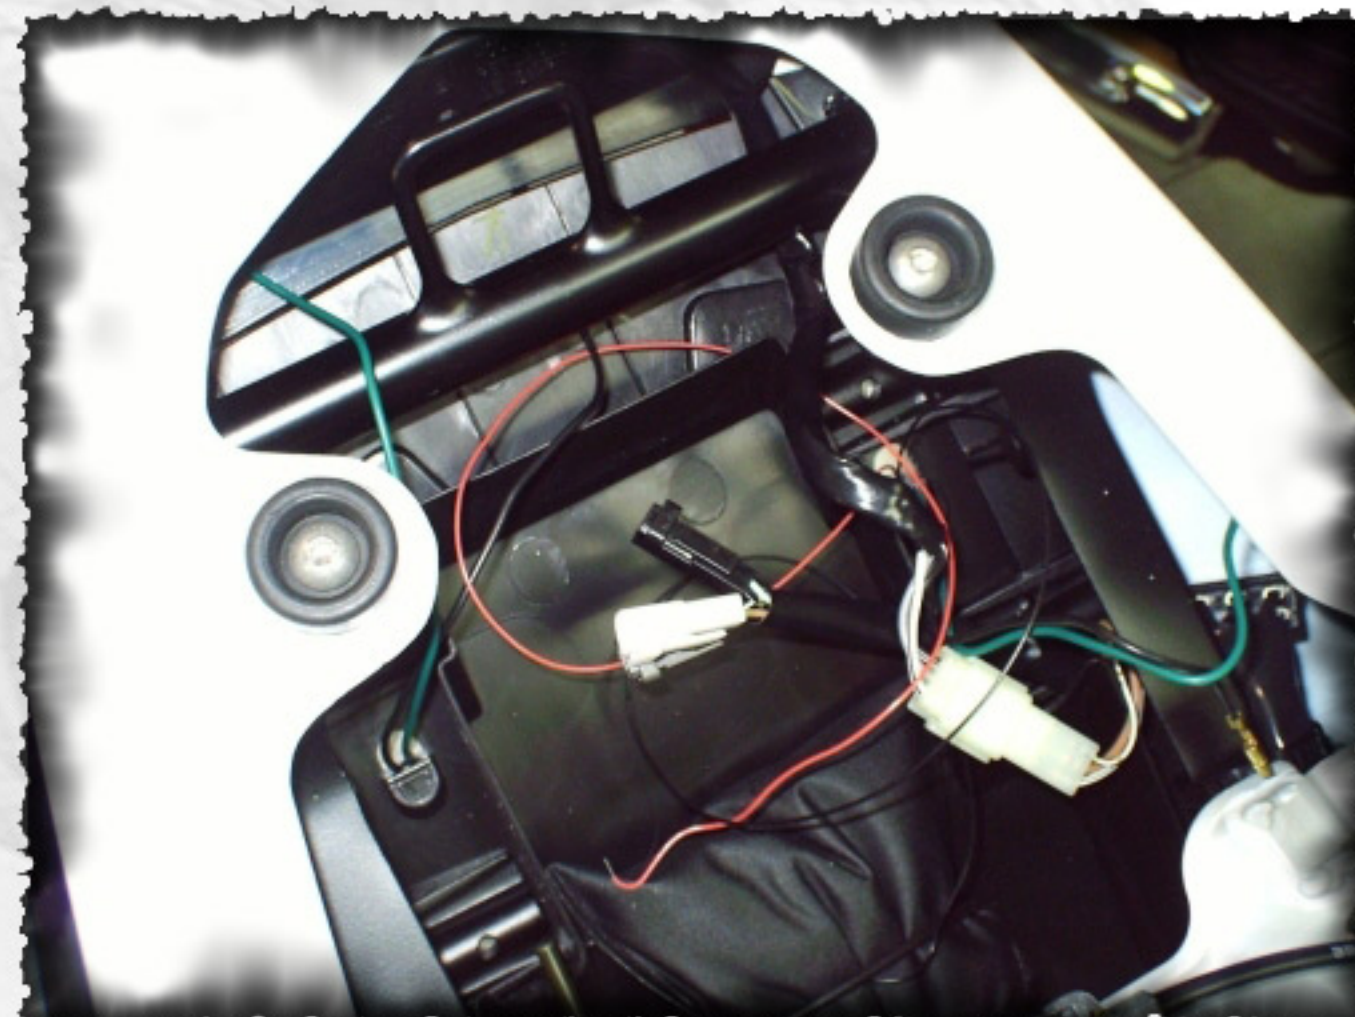

***For further assistance or information, we may be reached at info@rumbleconcept.com.*

***After any installations or modifications, the fender eliminator not returnable. We are not responsible for any damages to the part during the installation process, or to the bike (including the stock undertail part).*