



## **Gladius SFV650 09-10 FENDER ELIMINATOR RU36624**

**\*\*Note, with this kit your lock-seat (storage compartment) wont be completely secure anymore because of the access to the cable by underneath\*\***

*We at RumbleConcept encourage all installations to be performed by a professional. If you choose to install this product, please read all instructions and take all appropriate safety measures to ensure the proper and safe installation of your new fender eliminator.*

### **Before installation:**

*our fender eliminator have been designed for modification purposes, we are not responsible for the use or misuse of any products, or verification of the local department of motor vehicules.*

### **Included in the kit:**


- 1x RU36624 A main bracket
- 1x RU36624 B (frog face plate)
- 1x CY36425 Mini clone tail light
- 4x FA27961 M6 allen zinc bolt
- 4x FA27968 Nylon shoulder washer
- 2x AU27945 Nylon plate bolt/nut



- 1-Take off the seat, remove both handles.
- 2-Remove the black top tail section part by removing the 2 plastic snaps on the top to allow access to wiring on each side (see pic. 1).
- 2-Unscrew the Phillips screw underneath the mud guard (see pic 2)and pop-off the top part of the inner cover on the mud guard (see pic 3).
- 3-Unplug wires (signals, tail light, plate light) and detach lock-seat cable from the top part (see pic 4).
- 4-Unscrew the 4 bolts underneath that hold the mudguard and then gently pull it off with wires.
- 5-With the mud guard in hands unscrew the 2 phillips screws (hidden by your plate) and remove the stock signals with holder plates inside (see pic 5), that will allow to take off the bottom part of the inner cover on the mud guard.
- 6-With everything removed and still mud guard in hands sliding off the clip to remove the lock seat along with cable and "L" plate (keep everything for re-installation).
- 7-Re-install the lock seat on your new fender eliminator, the lock clip should be installed by the top, slide it down like shown (see pic 6).
- 8-Then mount the new tail light to your new fender eliminator.
- 9-By introducing the "frog face" plate between the fender and the sub-frame (to fill the gap at the rear end of the tail section) use the 4 allen bolts/nylon shoulder washers (provided) to install everything in place.
- 10-Drive all wires and do all necessary connections, make sure all light works properly.
- 11-Drive the lock-seat cable a little bit further then it was originally to eliminate the loose (see pic 7) , you can use the stock tie-rop on the sub frame to hold it in place.
- 12-Re-install the 2 handles and before you put back the seat make sure the lock seat cable works ok.
- 13-Your all set..have a great ride!!!

*\*\*For further assistance or information, we may be reached at [info@rumbleconcept.com](mailto:info@rumbleconcept.com).*

*\*\*After any installations or modifications, the fender eliminator not returnable. We are not responsible for any damages to the part during the installation process, or to the bike (including the stock undertail part).*

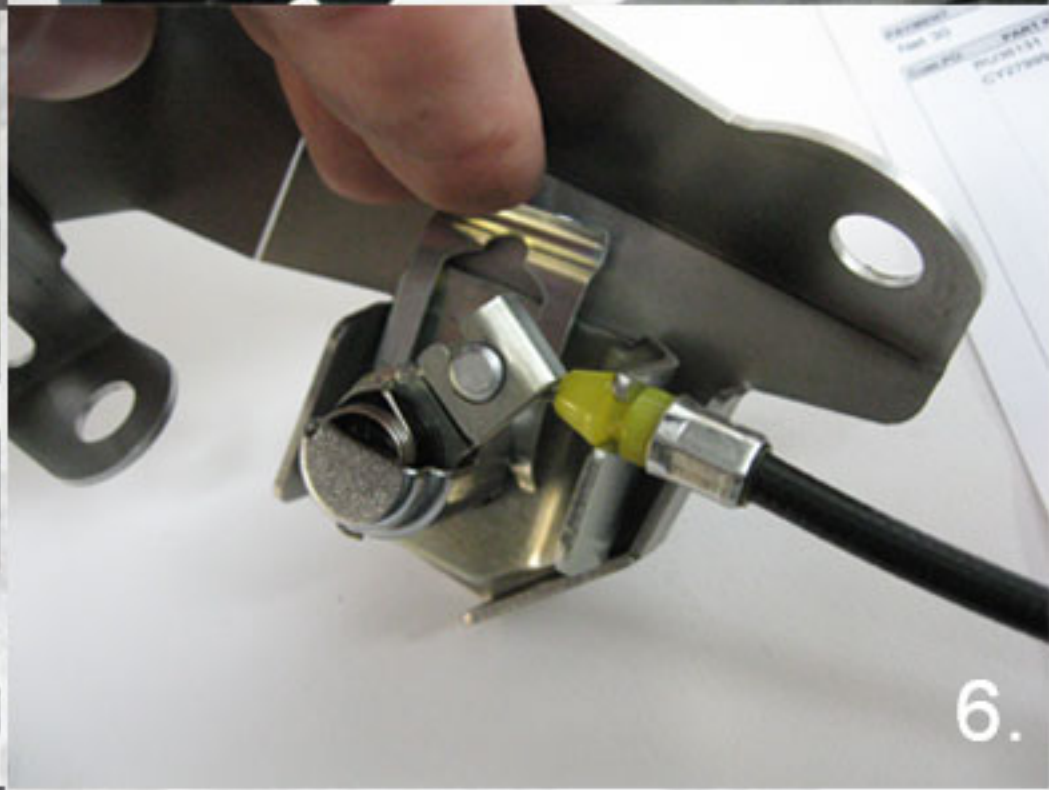

**\*\*For further assistance or information, we may be reached at [info@rumbleconcept.com](mailto:info@rumbleconcept.com).**

**\*\*After any installations or modifications, the fender eliminator not returnable. We are not responsible for any damages to the part during the installation process, or to the bike (including the stock undertail part).**