



## **R6S 03-09**

### **FENDER ELIMINATOR**

### **RU27232**

We at Rumble concept encourage all installations to be performed by a professional. If you choose to install this product, please read all instructions and take all appropriate safety measures to ensure the proper and safe installation of your new fender eliminator.

**Before installation:**

our fender eliminator have been designed for modification purposes, we are not responsible for the use or misuse of any products, or verification of the local department of motor vehicles.


**Tools required:**

- Allen Key 4mm
- Allen Key 5mm
- 10mm Box
- Phillips screwdriver

**Included in the kit:**

- 1 Fender Eliminator Bracket
- 1 Licence plate light
- 2 plate screws + nuts
- 4 nuts

1. Remove the front and rear seat.
2. Unscrew the tail piece. There is 1 Allen screw 4mm at the top, two phillips plastic rivets in front and six plastic rivets under the tail piece.
3. Unplug the flashers and licence plate light. Remove the mud guard, you need to unscrew the 4 Allen screws under the rear seat.
4. Install the Fender Eliminator, use the 4 nuts provided in the kit to fix it.
5. Plug the flashers and licence plate light.
6. Re-install the tail piece.
7. Put back the seats in place

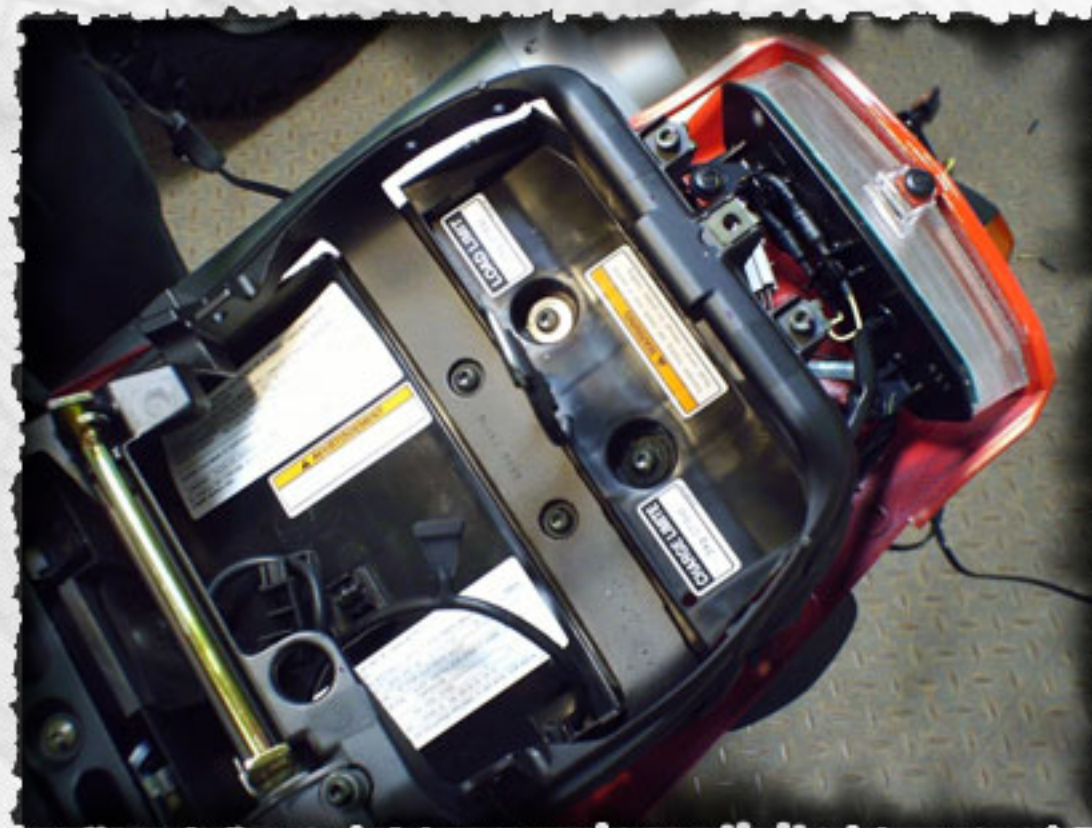

**\*\*For further assistance or information, we may be reached at [info@rumbleconcept.com](mailto:info@rumbleconcept.com).**

**\*\*After any installations or modifications, the fender eliminator not returnable. We are not responsible for any damages to the part during the installation process, or to the bike (including the stock undertail part).**